



t +86-760-22343190
 m +86 173 2816 2503
 e sales@luna-lighting.cn
 www.luna-lighting.com


Ceiling mount light big 4cells 15watts

The lamp shell is made of high heat efficiency die-casting aluminum material. The surface is treated with black powder spraying, with advantages of color fastness, corrosion resistance. The square designs reveal a sense of modern and fashion.

This product uses CREE/OSRAM SMD high-power LED chip and high quality isolated circuit power supply to ensure reliable quality.

This series of products offers a variety of optical effect choices :15/24/38/50/ corner, wall wash effect, and all come with anti-glare design, inherited LUNA professional commercial lighting concept.

This series of products can be used in shopping malls, shopping centers, exhibition halls, offices, etc.

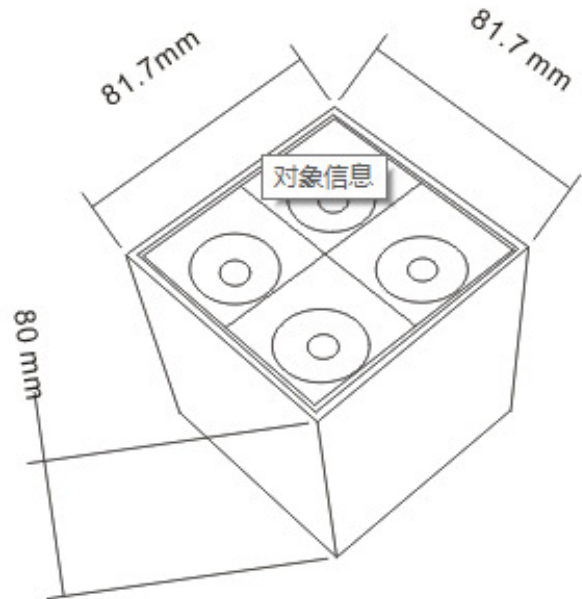

Product model: LN-CCOLINE-L4

Electrical

Power	15W Max. 5-15W optional
Input voltage	AC220-240V
Frequency	50..60Hz
Driver options	OSRAM,PHILIPS,KEGU,LIFUD,Anxiong
Dimming	on/off,TRAIC,0/1-10V,DALI
Class	III SELV
Ambient temperature	0 - 40°C
Relative humidity	<85%

LED

LED brand options	CREE,OSRAM,Samsung
-------------------	---------------------------

LED Qty	4
LED type	SMD5050
C.C.T.	3000K,4000K,6000K
CRI	>80,>90
Lumen maintenance	LM80
SDCM	4

Optical

Beam angle °	15,24,36,50,wall washer
Luminous flux (LED)* lm	1800
Lumen efficiency (LED)* lm/W	120
Luminous flux (Luminare)* lm	1050
Lumen efficiency (Luminare)* lm/W	70

Material

Body & heatsink	Die-casting aluminum
Housing	Die-casting aluminum
Optics	PMMA
Surface treatment	Powder coated
Color options	Matt Black
IP grade	IP20

Installation

Location	Interior
Fixition	Ceiling Mounted
Size mm	L81.7*W81.7*H80mm
Cutout mm	
Certificates	CE

On request

- different power, CRI, C.C.T..
- other LED Brands, CREE, OSRAM, SAMSUNG, Bridgelux, etc.
- other Drivers, OSRAM, PHILIPS, Meanwell, KEGU, Lifud, etc.

- dimming functions: TRIAC, 0/1-10V, DALI, Mesh, 2.4G
- emergency kit with specific duration.

*Due to the differences in test instruments and electronic components, the specific data may vary. Please confirm the specific parameters of the lamp before ordering to avoid misunderstanding. The luminous flux data and electrical data on the website will have +/-10% tolerance and measured at Tc 25°C indoors.

*Dimensions and specifications subject to alterations without notice.

Add: NO.16 Industrial 2nd Road, Caosan, Guzhen, Zhongshan, Guangdong, China . www.luna-lighting.com Email: sales@luna-lighting.cn Wechat: Luna_lighting

LUNA Mcfion Lighting Factory @ Copyright 2020